
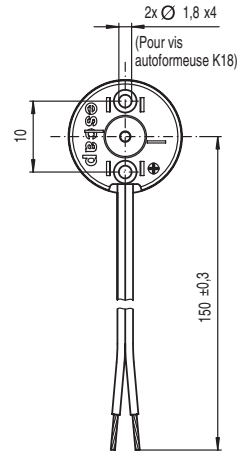
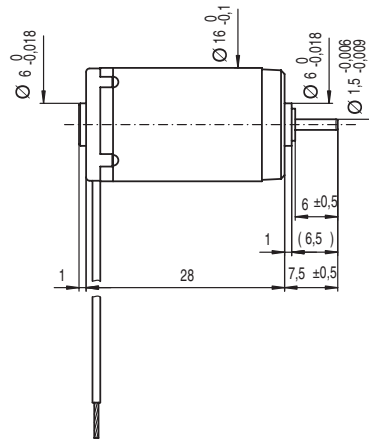


Max screw torque 40 mNm  
Max traction 230 N

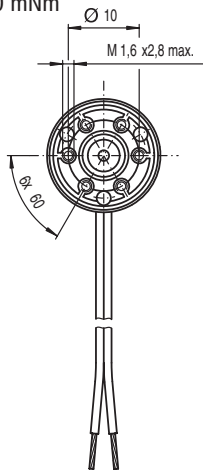

dimensions in mm  
mass: 24 g

16G88 ○○ • 1

Winding Type



-220P

-220E

-213E

-211E

-210E

-208E

Measured Values

	V	3	6	9	12	15	24
Measuring voltage	V	3	6	9	12	15	24
No-load speed	rpm	10600	10900	8000	8700	9000	10400
Stall torque	mNm (oz-in)	16 (2.3)	19.9 (2.8)	12.7 (1.80)	12.1 (1.71)	12.2 (1.73)	14.3 (2.0)
Average No-load current	mA	45	17	8	6.5	5.5	3.5
Typical starting voltage	V	0.02	0.05	0.12	0.18	0.20	0.30

Max. Recommended Values

	A	2.0	1.21	0.55	0.42	0.35	0.25
Max. continuous current	A	2.0	1.21	0.55	0.42	0.35	0.25
Max. continuous torque	mNm (oz-in)	5.2 (0.74)	6.3 (0.89)	5.8 (0.82)	5.4 (0.76)	5.4 (0.76)	5.4 (0.76)
Max. angular acceleration	10 <sup>3</sup> rad/s <sup>2</sup>	282	277	292	273	291	272

Intrinsic Parameters


	V/1000 rpm	0.28	0.55	1.12	1.37	1.65	2.3
Back-EMF constant	V/1000 rpm	0.28	0.55	1.12	1.37	1.65	2.3
Torque constant	mNm/A (oz-in/A)	2.67 (0.38)	5.3 (0.74)	10.7 (1.51)	13.1 (1.85)	15.8 (2.23)	22 (3.11)
Terminal resistance	ohm	0.5	1.6	7.6	13	19.5	37
Motor regulation R/k <sup>2</sup>	10 <sup>3</sup> /Nms	70	58	66	76	79	77
Rotor inductance	mH	0.01	0.045	0.15	0.26	0.40	0.72
Rotor inertia	kgm <sup>2</sup> 10 <sup>-7</sup>	0.8	0.91	0.8	0.8	0.74	0.8
Mechanical time constant	ms	5.6	5.3	5.3	6.1	5.8	6.1

Executions

		Single Shaft
Gearbox	Page	16G88
B16	102	5
BA16	103	5
R16	104	1

- Thermal resistance: rotor-body 8°C/W, body-ambient 35°C/W
- Thermal time constant - rotor / stator: 6 s / 500 s
- Max. rated coil temperature: 100°C (210°F)
- Recom. ambient temperature range: -30°C to +85°C (-22°F to +185°F)
- Viscous damping constant: 0.05 x 10<sup>-6</sup> Nms
- Max. axial static force for press-fit: 100 N
- End play: ≤150 µm
- Radial play: ≤30 µm
- Shaft runout: ≤10 µm
- Max. side load at 5 mm from mounting face: - sleeve bearings 1.5 N
- Motor fitted with sleeve bearings

Max. Recommended Speed

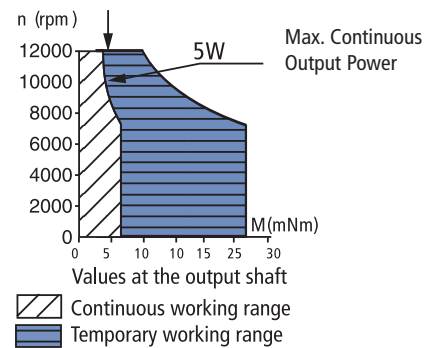

DANAHER MOTION is a trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy and reliability of the specifications in this publication. Specifications are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. It is the responsibility of the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.