

dimensions in mm
mass: 114 g

26N58 $\odot\odot \cdot 1$

26N48 $\odot\odot \cdot 6$

Winding Type

$\odot\odot$

-216P

-113P

-216E

-113

-110

Measured Values

Measuring voltage	V	6	7.5	12	15	24
No-load speed	rpm	4500	5500	4700	5500	6700
Stall torque	mNm (oz-in)	29.6 (4.19)	25.5 (3.6)	28.6 (4.06)	25 (3.5)	25 (3.54)
Average No-load current	mA	31	30	16	15	12
Typical starting voltage	V	0.08	0.1	0.15	0.2	0.28

Max. Recommended Values

Max. continuous current	A	1.47	1.19	0.74	0.60	0.41
Max. continuous torque	mNm (oz-in)	17.9 (2.5)	15.7 (2.1)	17.3 (2.4)	15.1 (2.1)	13.3 (1.88)
Max. angular acceleration	10^3 rad/s^2	119	100	115	100	89

Intrinsic Parameters


Back-EMF constant	V/1000 rpm	1.29	1.35	2.5	2.7	3.5
Torque constant	mNm/A (oz-in/A)	12.3 (1.74)	12.9 (1.83)	23.9 (3.38)	25.8 (3.65)	33.5 (4.74)
Terminal resistance	ohm	2.5	3.8	10	15.2	32
Motor regulation R/k^2	$10^3/\text{Nms}$	16	23	18	23	29
Rotor inductance	mH	0.2	0.3	0.8	1.1	1.7
Rotor inertia	$\text{kgm}^2 \cdot 10^{-7}$	6	6	6	6.7	6
Mechanical time constant	ms	9.7	14	11	14	17

Executions

		Single Shaft	Double Shaft for E9
Gearbox	Page	26N58--	26N48--
R22	105	5	9
M22	106	5	9
K24	107	5	9
K27	108	5	9
RG1/8	111	1	6
RG1/9	112	1	6
K38	110	1	6
L10	115	1	6

- Thermal resistance: rotor-body 5°C/W, body-ambient 12°C/W
- Thermal time constant - rotor / stator: 10 s / 640 s
- Max. rated coil temperature: 100°C (210°F)
- Recom. ambient temperature range: -30°C to +85°C (-22°F to +185°F)
- Viscous damping constant: $0.45 \times 10^{-6} \text{ Nms}$
- Max. axial static force for press-fit: 250 N
- End play: $\leq 150 \mu\text{m}$
- Radial play: $\leq 30 \mu\text{m}$
- Shaft runout: $\leq 10 \mu\text{m}$
- Max. side load at 5 mm from mounting face: sleeve bearings 6 N, ball bearings 8 N
- Motor fitted with sleeve bearings (ball bearings optional)

Max. Recommended Speed

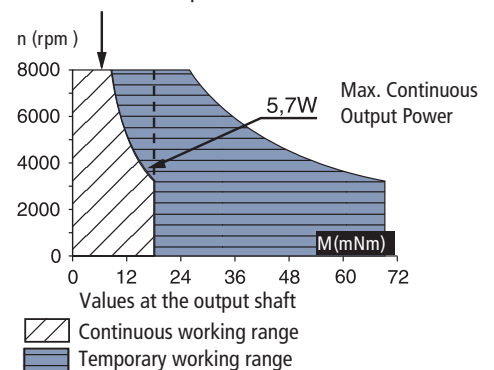

DANAHER MOTION is a trademark of Danaher Corporation. Danaher Motion makes every attempt to ensure accuracy and reliability of the specifications in this publication. Specifications are subject to change without notice. Danaher Motion provides this information "AS IS" and disclaims all warranties, express or implied, including, but not limited to, implied warranties of merchantability and fitness for a particular purpose. It is the responsibility of the product user to determine the suitability of this product for a specific application. ©2004 Danaher Motion.